




RADIAC SYSTEM

for Naval Vessel

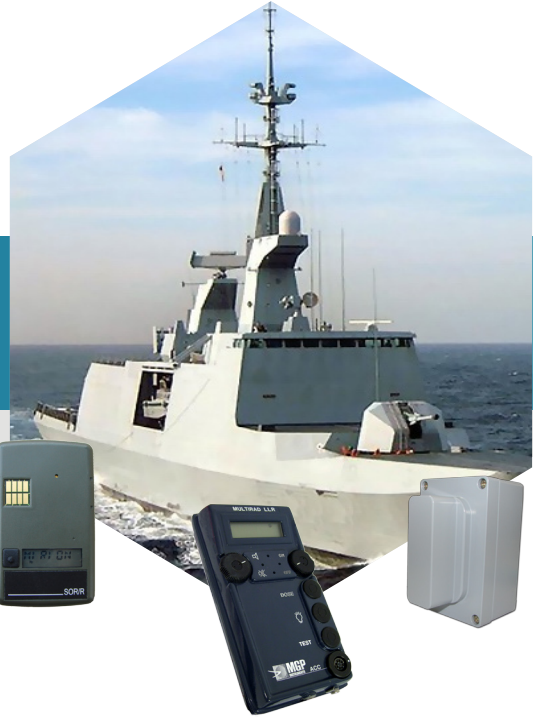

Nuclear
Power



Healthcare



Homeland
Security
& Defense



Labs and
Education



Industrial and
Manufacturing

OVERVIEW

This system is based on Radiac LLR probes connected to RADIVIEW management software operated from the NBC console. Individual dosimeters and portable survey meter can be also managed by the system.

KEY FEATURES


- Detection and warning of Nuclear radiation for ships operating in a NBC threat environment
- Complies with ANEP-57
- NATO references
- Real-time monitoring of the nuclear radiation hazard inside and outside the ship (airframe, decks, NBC filtration units)
- Operates fixed mounted and portable detection units
- Includes RADIAC software for data acquisition, display and warning at the NBC console
- Crew dose management
- Interface with the on-board integrated platform management system
- Open system, allows extensions

SYSTEM DESCRIPTION

- Fixed-mounted γ smart probes for inside/outside measurements
- Portable doserate meters for γ radiations
- α β contamination external probes (Multirad)
- Dosimeters (SOR) for crew with readers (XOM)
- RADIAC software in the NBC console

RADIAC SOFTWARE

- Acquisition and real time monitoring of detection data
- Graphical presentation of measurements and probe status
- Local and remote display
- History of the measurements
- Crew member dose management
- Dose prediction by extrapolation of doserate information
- Operates under MS WINDOWS™ environment

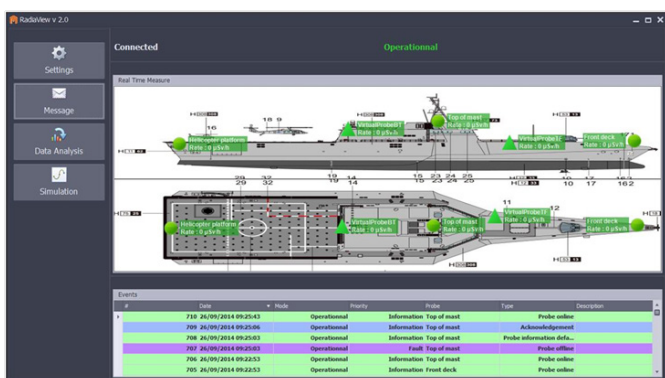

- Periodic built-in test
- Programmable alarm thresholds
- Power supply: 18 to 32 VDC
- Networkable (RS 485)
- Operating range: -40° C to +60°C (-40°F to +140°F)
- Decontaminable
- Shock resistant MIL-S901D with shock absorbers
- EMC Compliant with MIL-STD 461
- Waterproof IP68
- Size: 125 x 80 x 145 mm (4.92 x 3.14 x 5.70 in)*
- Weight: 915g (2,02 lb)
- Vibration resistant to MIL STD 167
- EMP and TREE resistant
- * without mounting plate and shock absorbers

SOR DOSIMETER (OPTION)

- Silicon detector
- Flash γ and neutron detection
- γ residual detection
- Very small and light weight
- 1 μ Sv to 10 Sv dose range

XOM READER (OPTION)


- Collection of data issued from the dosimeters
- Dosimeter allocation and configuration
- «Hands-free» data transmission with SOR dosimeter, even when worn under protective suits or clothing

MULTIRAD SURVEY METER (OPTION)

- GM detectors
- γ range: 0.1 μ Gy/h to 9.9 Gy/h
- External probes for measuring α and β contamination

PROBE CHARACTERISTICS

- Energy range: 50 keV to 1.3 MeV
- Doserate range: 50 nGy/h to 10 Gy/h
- Complies with IEC 532

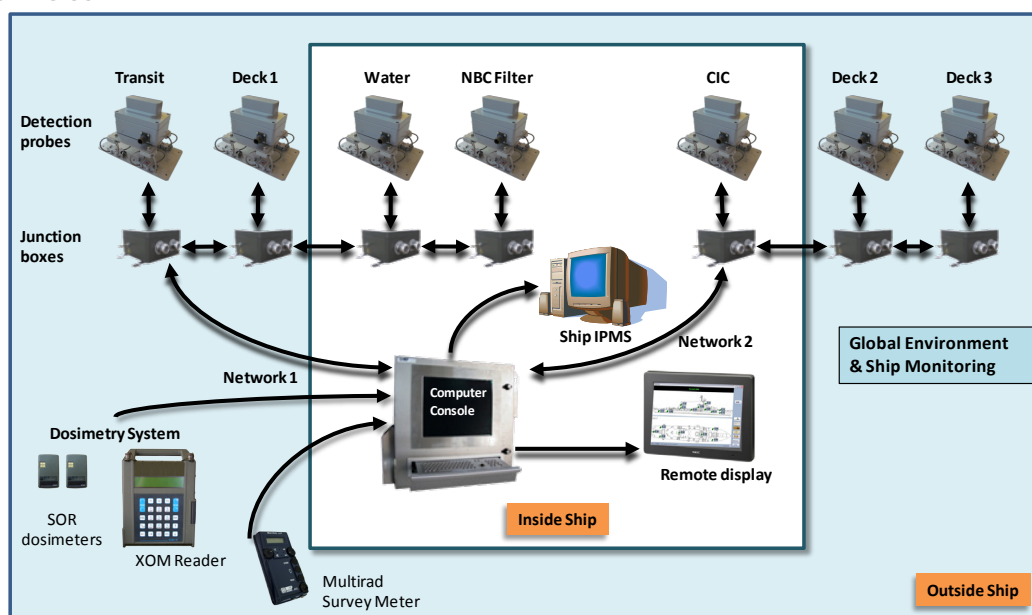

> CHINA - SHANGHAI
T: +86 21 6180 6920 | E: info-cn@mirion.com

> FINLAND - TURKU
T: +358 2 4684 600 | E: info-fi@mirion.com

> FRANCE - LAMANON
T: +33 (0) 90 59 59 59 | E: info-fr@mirion.com

> GERMANY - HAMBURG
T: +49 40 85193 0 | E: info-de@mirion.com

> USA - SMYRNA, GEORGIA
T: +1 770 432 2744 | E: info-us@mirion.com

Copyright (c) 2014 Mirion Technologies, Inc. or its affiliates. All rights reserved. Mirion, the Mirion logo, and other trade names of Mirion products listed herein are registered trademarks or trademarks of Mirion Technologies, Inc. or its affiliates in the United States and other countries. Third party trademarks mentioned are the property of their respective owners.